
Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

# MX5011B-DE29 Outdoor 802.11ac Wireless Bridge (20km)

#### **Features**

- Support IEEE 802.11a/n/ac standard
- Maximum transfer rate 867Mbps
- Support intelligent QoS function, realize voice, video, and text's priority transmission through powerful text recognition, priority setting, and priority scheduling functions to meet various business needs
- The system supports dual firmware switching between master and backup version, automatic synchronization backup of both parts, automatic detect & switch system failures function to enhance equipment stability and realizing automatic recovery from system failures
- Support web management, making equipment installation and maintenance more convenient
- Support 802.3at Protocol (POE+)
- Support pole-mounted, both horizontal and vertical
- Support Gigabit Ethernet port, adapt to multiple types of network access
- IP68 waterproof level is suitable for a variety of environments
- \*Wireless controller needs to be purchased separately

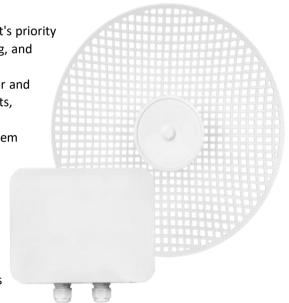

# **Description**

MX5011B-DE29 Outdoor 802.11ac Wireless Bridge (20km) supports the 802.11a/n/ac protocol, with a maximum rate of 867Mbps, optimizing the use of bandwidth and Internet speed. It can support WDS access point/WDS client working mode to meet different application requirements. It supports Gigabit Ethernet port, which can be flexibly applicable to different network access plans.

It can provide customers with a stable wireless signal transfer and ensure the good experience of stable, high-quality and convenient network services. It also incorporates several leading core achievements to make sure stable, reliable coverage and high-throughput performance in all scenes. Its structural design fully considers the applications in extreme industrial environments and is designed to meet the IP68 waterproof standard, making it an ideal choice for industrial-grade Wi-Fi coverage equipment.



Nanjing MAXON O.E. TECH. CO., LTD TEL: 86-25-86380932

WEB: www.mxcomm.cn E-MAIL: info@maxonc.com

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.



#### 27dBm high power

The highest output power can reach 27dBm, and the external directional 29dBi antenna brings brilliant Wi-Fi transmission distance



#### Long distance transmission

Ultra-long-distance, high-bandwidth backbone network transmission



### Multiple installation design

Rod type installation design, support horizontal and vertical angle adjustment, easy to install



#### **Protection Class IP68**

Protection Class reaches to IP68, suitable for a variety of environments



#### 2x2 MIMO

Supports 2x2 MIMO standard



## High throughput

Maximum transfer rate 867Mbps



# **Gigabit Ethernet**

Support Gigabit Ethernet access



#### **POE** powered

Support 100-meter Ethernet POE power supply, easy to deploy and networking

# **Specification**

HARDWARE	Shell	metal + PC	
	Host size	262*194*72mm	
	Net weight	3.75kg	
	Installation	pole-mounted	
	Waterproof	IP68	
	Antenna size	Ф600mm	
	Antenna Gain	29dBi	
	Antenna type	built-in directional antenna	
	Transmission distance	0 <sup>2</sup> 0km	



WEB: www.mxcomm.cn E-MAIL: info@maxonc.com

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

HARDWARE	Power supply mode	48V 0.5A POE
	Maximum power consumption (W)	12W
	Maximum transmit power	27dBm
	Connector (WAN)	10/100/1000Mbps
	Connector (LAN)	10/100/1000Mbps or 1000Mbps SFP
	Button	1*Reset
	Indicator	1*POWER, 1*system, 1*5.8G working
	Working temperature	-40℃~70℃/-40~158°F
	Storage temperature	-40℃~85℃/-40~185°F
	Working humidity	5%~95%RH non-condensing
	Surge immunity	POE/GE: common mode 4KV, differential mode 2KV
	Electrostatic discharge immunity	Contact discharge: 6KV, Air discharge: 8KV
	Mounting kit	2 x RJ45 M25 PG waterproof connector (optional SFP waterproof connector) 1 x Ceiling Mount Kit 1 x 48V 0.5A POE Adapter 1 x AC Power Cord 1 x Product Instruction Manual 1 x Product Certificate & Warranty Card
SOFTWARE	Working Protocol	802.11 a/n/ac
	Maximum speed	867Mbps
	Frequency range	5180~5320MHz, 5745~5825MHz
	Channel width	20/40/80MHz
	Working Mode	WDS Access Point, WDS Client
	Security Configuration	WPA2-PSK, Hidden SSID, IP/MAC Filtering
	Application Mode	WDS Access Point, WDS Client
	Configuration management	support web configuration, support AC remote management, support SNMP management
	Ethernet software features	support IPv4/IPv6 dual protocol stack DNS, HTTP, IPv4, LLDP, Proxy ARP, SMTP, SNMP v2c/v3, Syslog, TCP/IP, SSH, UDP, VLAN




Nanjing MAXON O.E. TECH. CO., LTD TEL: 86-25-86380932 WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com


Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

SOFTWARE	Dynamic frequency selection	support intelligent channel analysis & automatic optimal channel selection support 5GHz DFS
	Intelligent Bandwidth Rate Limiting	Support IP and MAC-based upstream and downstream rate limiting
	IoT expansion	reserved UART interface to support IoT application expansion such as Bluetooth, ZigBee, UWB, etc.
	Others	Scheduled restart, QoS, Watchdog
APPLICATION	Wireless video surveillance (traffic, urban, public security, oil and gas pipelines, forest fire prevention and security, residential and other key areas monitoring) Wireless video/data transmission and wireless coverage in railway, transportation, power and other industries Operator Main Wireless Network Construction Wireless network coverage of rural informatization construction	

## **Dimensions**

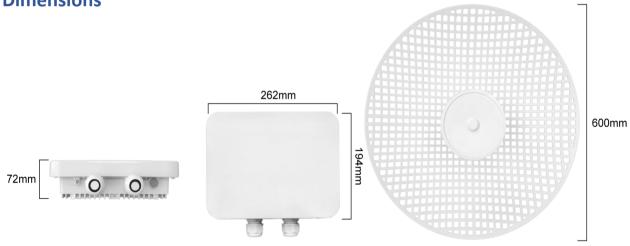

#### **Connector**

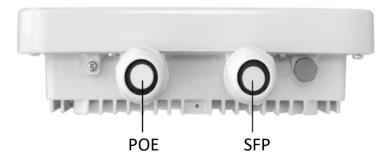

**MAXON** 

Link Of Your Think


Nanjing MAXON O.E. TECH. CO., LTD

TEL: 86-25-86380932 WEB: www.mxcomm.cn


E-MAIL: info@maxonc.com

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

#### **Antenna Radiation Pattern**

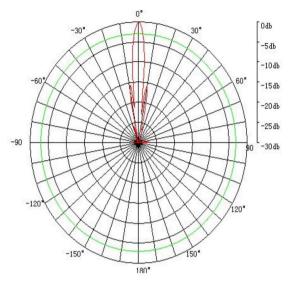

horizontal pattern

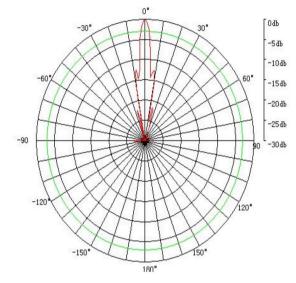

vertical pattern

TEL: 86-25-86380932 WEB: www.mxcomm.cn E-MAIL: info@maxonc.com